

AC 56

Self Contained Ice Machine 32 kg

Scotsman
Ice Systems

Item #:

Project:

Quantity:



FEATURES

- Produces individual Gourmet crystal clear ice cubes.
- Resistant stainless steel exterior.
- Simple and reliable electromechanic controls.
- Front panel in and out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled model only).
- Easily accessible front panel mount ON-OFF switch.
- Ergonomically designed ice storage access, with disappearing door. Door-closing movement dampening system.
- Water system protected by patented anti-scale system.
- Legs are not included and must be ordered separately as an accessory.



AC L 56
Large Gourmet 39 g
Ø 38 x H 41 mm



AC M 56
Medium Gourmet 20 g
Ø 30 x H 34 mm



AC S 56
Small Gourmet 8 g
Ø 21 x H 25 mm

CONDENSING SYSTEM

Air cooled
Water cooled

REFRIGERANT GAS

R134a

VOLTAGE V/Hz/ph

230/50/1
230/60/1

INTERNAL BIN CAPACITY

12 kg

CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10	+10

IMPORTANT NOTICE:

Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

Download our free **App Scotsman Ice**
Apple store
Google play
Windows store

DOWNLOAD

www.scotsman-ice.it
www.scotsman-ice.com

Self Contained Ice Machine 32 kg

AC 56


Self Contained Ice Machine 32 kg

Scotsman®
Ice Systems

Item #:

Project:

Quantity:

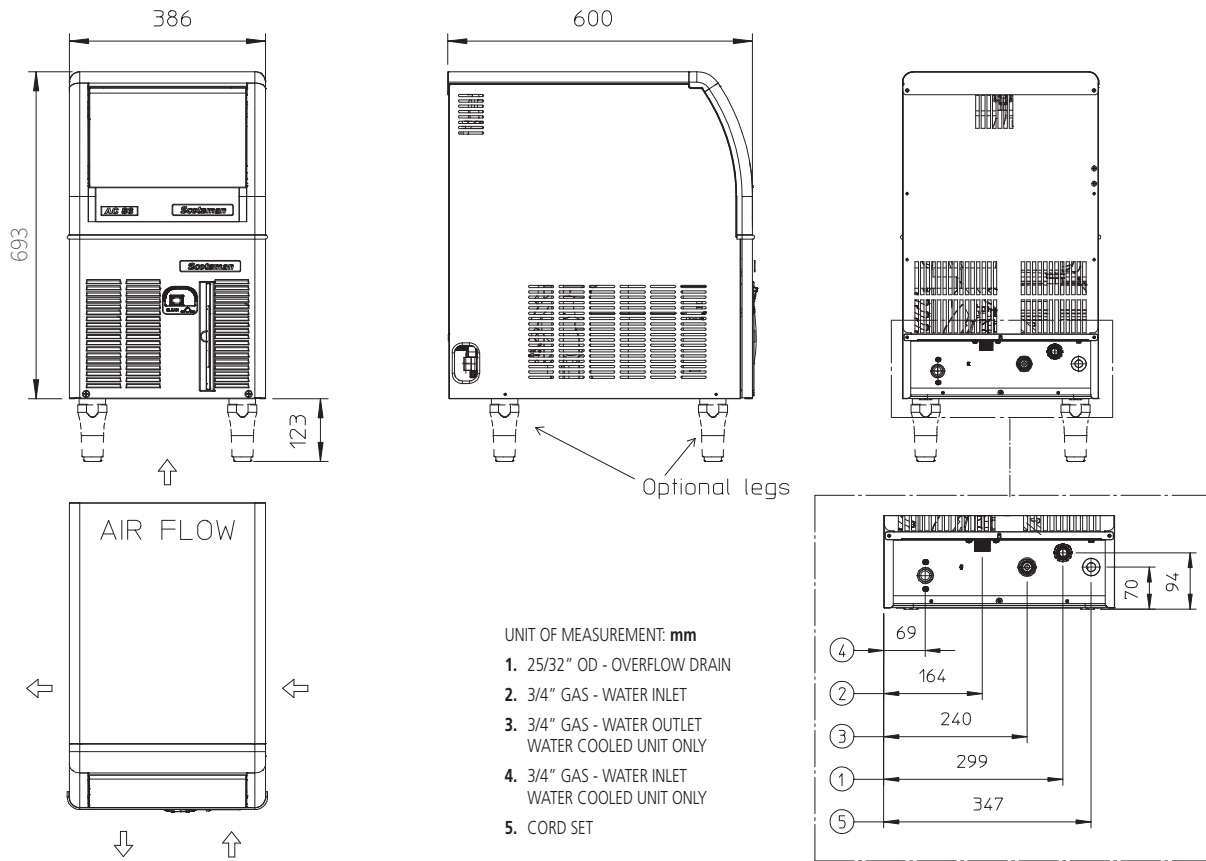

UNIT DATA				SHIPPING DATA							
Size (W x D x H)		386 x 600 x 695 mm		Carton (W x D x H)		460 x 670 x 810 mm					
Net weight		36 kg		Weight		43 kg					
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
		kg	kg	kg							
ACL 56 AS	230/50/1	31	30	23	33.1	7.6	4.2	400	800	3 x 1.5	10
ACL 56 WS	230/50/1	31	30	23	33.1	7.6	20.2	400	800	3 x 1.5	10
ACM 56 AS	230/50/1	32	31	24	33.0	7.9	3.8	400	800	3 x 1.5	10
ACM 56 WS	230/50/1	33	31	27	26.0	7.0	20.2	400	800	3 x 1.5	10
ACS 56 AS	230/50/1	25	24	19	38.6	7.1	3.1	400	800	3 x 1.5	10
ACS 56 WS	230/50/1	25	24	19	38.6	7.1	20.2	400	800	3 x 1.5	10
ACM 56 AS	230/60/1	35	34	27	32.3	8.6	4.4	470	900	3 x 1.5	10
ACM 56 WS	230/60/1	35	34	27	32.3	8.6	20.2	470	900	3 x 1.5	10
(*) Data refer to 32°C Amb. / 21°C Water temperature conditions											

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions