

AC 206

Scotsman
Ice Systems

Self Contained Ice Machine 130 kg

Item #:

Project:

Quantity:



FEATURES

- Produces individual Gourmet crystal clear ice cubes.
- Resistant stainless steel exterior.
- Front panel in and out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled version only)
- Easily accessible front panel mount ON-OFF Switch
- Routine maintenance visible alarm light on front pane
- Ergonomically designed ice-storage access, with disappearing door. Door-closing movement dampening system.



AC L 206
Large Gourmet 39 g
Ø 38 x H 41 mm



AC M 206
Medium Gourmet 20 g
Ø 30 x H 34 mm



AC S 206
Small Gourmet 8 g
Ø 21 x H 25 mm

CONDENSING SYSTEM

Air cooled
Water cooled

REFRIGERANT GAS

R404A
R452A

VOLTAGE V/Hz/ph

230/50/1
230/60/1

INTERNAL BIN CAPACITY

50 kg

CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10	10

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

Download our free **App Scotsman Ice**
Apple store
Google play
Windows store

DOWNLOAD

www.scotsman-ice.it
www.scotsman-ice.com

Self Contained Ice Machine 130 kg


8 February 2019

AC 206

Self Contained Ice Machine 130 kg

Scotsman
Ice Systems

Item #:
Project:
Quantity:

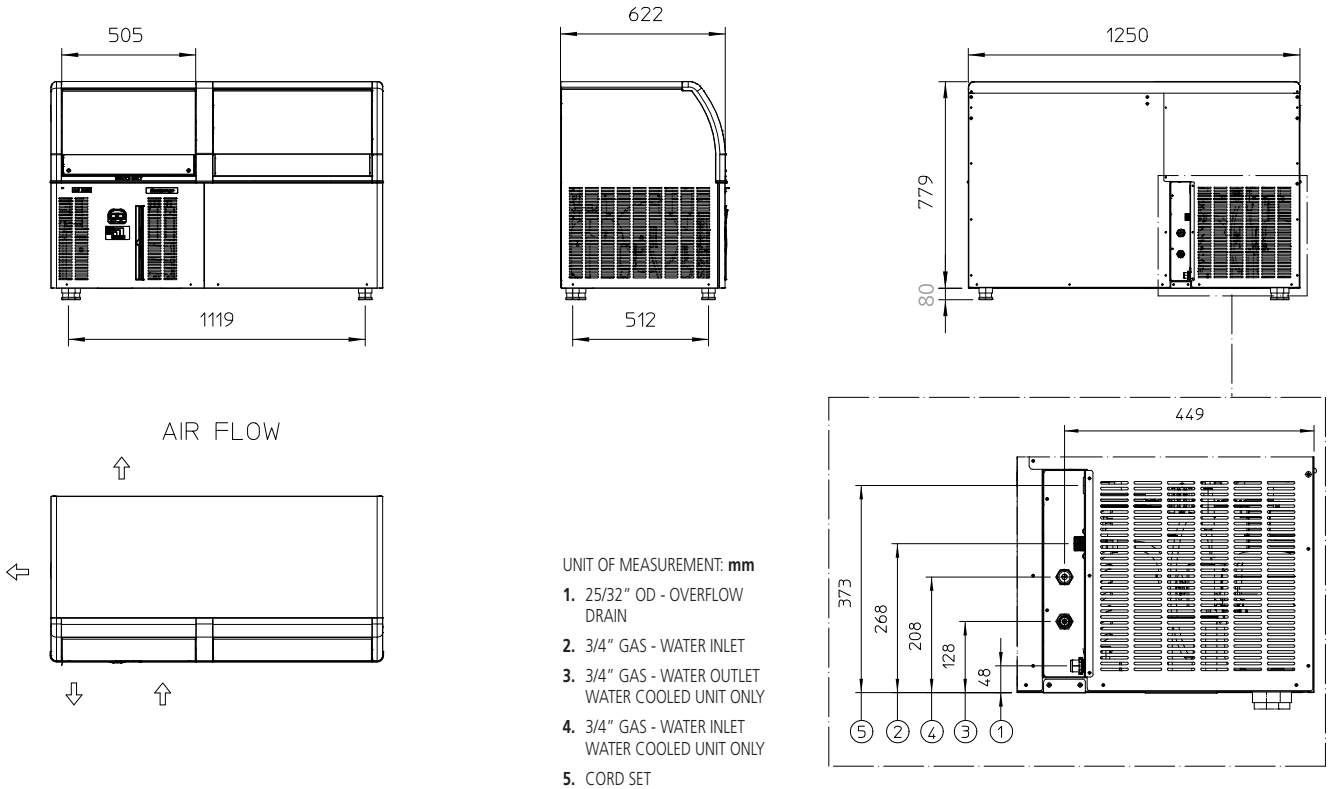

UNIT DATA				SHIPPING DATA				All data refer to R404A refrigerant models			
Size (W x D x H)		1250 x 622 x 859 mm		Carton (W x D x H)		1320 x 690 x 960 mm					
Net weight		82 kg		Weight		95 kg					
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
		kg	kg	kg							
AC L 206 AS	230/50/1	126	117	92	21.6	20.5	9.6	950	2100	3 x 1.5	16
AC M 206 AS	230/50/1	130	123	91	19.9	18.1	10.8	850	1770	3 x 1.5	10
AC S 206 AS	230/50/1	100	93	72	29.8	21.3	7.5	950	2100	3 x 1.5	16
AC L 206 WS	230/50/1	126	124	112	15.4	17.2	115.8	700	2100	3 x 1.5	16
AC M 206 WS	230/50/1	128	126	108	14.9	16.1	81.3	760	1770	3 x 1.5	10
AC S 206 WS	230/50/1	100	93	72	29.8	21.3	81.3	950	2100	3 x 1.5	16
AC M 206 AS	230/60/1	130	123	91	24.0	21.8	12.5	1050	2050	3 x 1.5	16

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions