

MXG 638

EXTREME

Scotsman
Ice Systems

Modular Ice Machine 330 kg

Item #:

Project:

Quantity:



FEATURES

- Individual transparent solid cube: each single cube is an artwork: crystal clear and perfectly shaped, faithful to the Scotsman tradition.
- Global standard footprint: strictly follows international imperial standard commonly adopted in the industry of reference.
- Agion: the technology that makes products cleaner and longer lasting with built-in protection working 24/7 to resist the growth of microbes and the development of unpleasant odors.
- Electronic control: ambient and water temperatures may change throughout the years but your ice will stay the same.
- External indicator lights: keeps ice maker's operations under constant surveillance.
- Front access condenser air filter: a do-it-yourself cleaning operation that saves time and money and makes your ice maker live longer.
- Clean alert: advises with a blink when it's time to clean the filter.



MXG XL 638
Extra Large Gourmet 60 g
Ø 44 x H 46 mm



MXG L 638
Large Gourmet 39 g
Ø 38 x H 41 mm



MXG M 638
Medium Gourmet 20 g
Ø 30 x H 34 mm



MXG S 638
Small Gourmet 8 g
Ø 21 x H 25 mm

CONDENSING SYSTEM

Air cooled
Remote condenser
Water cooled

REFRIGERANT GAS

R404A

VOLTAGE V/Hz/ph

230/50/1
230/60/1
400/50/3N

RECOMMENDED BINS

Head	Bins		kg
MXG 638	✓	SB393	181
	✓	SB530	243
	BINTOPMXGSB55	SB550	252
	CBT48EAMCD	SB948	406
	CBT52EAMCD	SB1025	478
	●	UBH1600	812
	●	SIS1350	613 + 73 + 73

LEGEND:

- ✓ : Perfect combination between ice maker and bin
- : Ice chute cut-out performed upon installation
- CBTxxxxxxx : need additional bin top

CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10	10

IMPORTANT NOTICE:

Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

Download our free **App Scotsman Ice**

Apple store
Google play
Windows store

DOWNLOAD

www.scotsman-ice.it
www.scotsman-ice.com

Modular Ice Machine 330 kg

21 January 2019

MXG 638

EXTREME




Scotsman®
Ice Systems

Modular Ice Machine 330 kg

Item #:

Project:

Quantity:

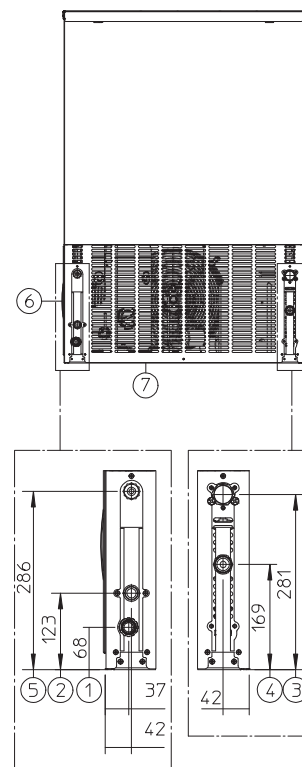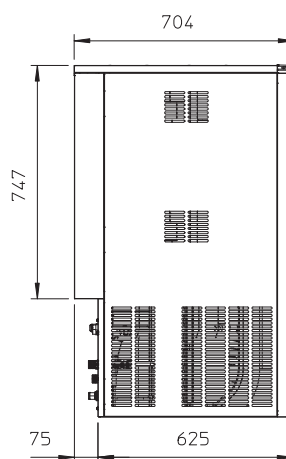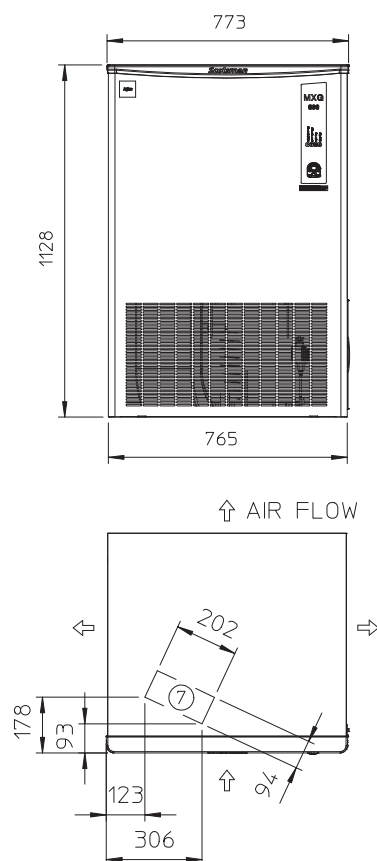

UNIT OF MEASUREMENT: mm

1. 13/16" OD - OVERFLOW DRAIN
2. 3/4" GAS - WATER INLET
3. 3/4" GAS - WATER OUTLET
WATER COOLED UNIT ONLY
4. 3/4" GAS - WATER INLET
WATER COOLED UNIT ONLY
5. CORD SET
6. CLEANING AIR FILTER

UNIT DATA					SHIPPING DATA						
Size (W x D x H)		773 x 704 x 1128 mm			Carton (W x D x H)		830 x 770 x 1320 mm				
Net weight		116 kg			Weight		129 kg		All data refer to R404A refrigerant models		
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
MXG L 638 AS	230/50/1	290	285	230	21.5	49.5	27.9	2500	7400	3 x 2.5	20
MXG M 638 AS	230/50/1	330	310	220	23.2	51.0	22.9	2500	7400	3 x 2.5	20
MXG XL 638 AS	230/50/1	260	260	210	24.8	52.0	75.0	2800	7400	3 x 2.5	20
MXG S 638 AS	230/50/1	360	345	240	23.2	55.6	39.2	2800	7400	3 x 2.5	20
MXG L 638 AS	400/50/3N	290	285	230	22.0	50.5	27.5	2850	7300	5 x 1.5	20
MXG M 638 AS	400/50/3N	330	310	220	23.6	52.0	27.9	2800	7300	5 x 1.5	20
MXG M 638 ASR	400/50/3N	330	310	220	23.6	52.0	27.9	2800	7300	5 x 2.5	20
MXG L 638 WS	230/50/1	290	285	250	19.8	45.5	200.0	2100	7400	3 x 2.5	20
MXG M 638 WS	230/50/1	340	325	290	16.6	48.0	225.0	2200	7400	3 x 2.5	20
MXG S 638 WS	230/50/1	340	325	280	18.6	52.0	275.0	2300	7400	3 x 2.5	20
MXG M 638 WS	400/50/3N	340	325	290	16.4	47.5	250.0	2200	7300	5 x 1.5	20
MXG L 638 AS	230/60/1	320	285	230	21.7	52.0	29.2	2900	5500	3 x 2.5	24
MXG M 638 AS	230/60/1	330	310	220	26.4	58.0	33.3	3000	5500	3 x 2.5	25
MXG S 638 AS	230/60/1	360	345	275	21.8	60.0	39.2	3000	5500	3 x 2.5	25
MXG L 638 WS	230/60/1	310	290	270	16.9	45.7	208.3	2100	5500	3 x 2.5	20
MXG S 638 WS	230/60/1	360	345	275	21.8	60.0	208.3	3000	5500	3 x 2.5	25

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions