

Self Contained Ice Machine up to 70 Kg




Look for this "icon" in order to identify the Scotsman AF units which offer the demineralised or distilled water ice production as an option.



KITLEGSEXT000
Available as optional



Electronic



Features

- Up to 70 kg (154 lbs.) of flake ice production per day
- Up to 25 kg (55 lbs.) built-in ice storage
- Electronically controlled operation, with self-diagnostic functions with external alarm lights providing operational information for early alert and fast diagnosis of operating issues
- External Components constructed from corrosion-resistant stainless steel crafted for optimal aesthetic appeal through superior fit and finish
- Ergonomically convenient, slanted & disappearing storage bin door
- Front Access for Easier Maintenance
- Front-in, front-out airflow allows for built-in installations
- CFC Free R-134a Refrigerant
- 120 mm (4 3/4") legs included, extensions available as option
- Two years manufacturer warranty

AF 80 Technologies



		24h		24h			
		10°: 10°C	21°: 15°C	10°: 10°C	21°: 15°C		
		[kg] [lbs]	[kg] [lbs]	[kg] [lbs]	[kg] [lbs]		
AF 80 AS		70 154	64 141	25 55	25 55		
AF 80 WS		73 161	64 141	25 55	25 55		
*Estimate number of small, medium or large size gourmet cubes. Standard legs 120 mm high included.							

This product qualifies for the following listings:



Flake Ice
Residual water content 25%



Ice in its most natural form, made at a temperature just below zero degrees Celsius, contains 25% residual water content, making it very moist. Its flake shape makes it extremely versatile and very simple to use effectively.

2 Years Warranty


Subject to certain limitations and exclusions

Certified ISO 9001:2000

www.scotsman-ice.it
www.scotsman-ice.com
www.scotsman-ice-on-tablet.com

Models and specifications are subject to change without notice.

Self Contained Ice Machine up to 70 Kg

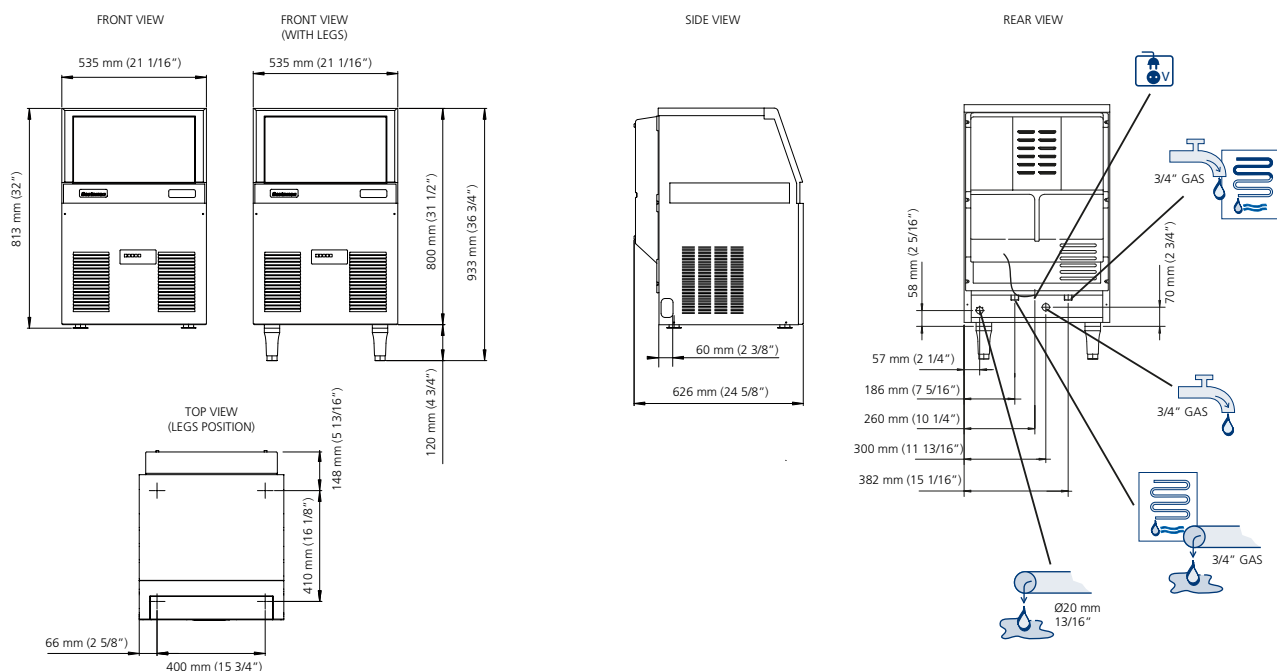

AF 80 AIR COOLED

°C °F	50° 10°	60° 15°	70° 21°	90° 32°	
10°	70	67	64	58	kg
50°	154	147	141	128	lbs
21°	67	64	61	55	kg
70°	147	141	134	121	lbs
32°	56	54	53	50	kg
90°	123	119	117	110	lbs
38°	51	49	48	45	kg
100	112	108	106	99	lbs



AF 80 WATER COOLED

°C °F	50° 10°	60° 15°	70° 21°	90° 32°	
10°	73	71	69	65	kg
50°	161	156	152	143	lbs
21°	66	64	62	58	kg
70°	145	141	136	128	lbs
32°	60	58	56	52	kg
90°	132	128	123	114	lbs
38°	58	56	54	50	kg
100	128	123	119	110	lbs



Minimum

10°C (50°F)



Maximum

40°C (104°F)

5°C (41°F)

-10%

1 BAR
14 psi

35°C (95°F)

+10%

5 BAR
70 psi

Model	Compressor	Capacity [Btu/h] [W]	Dimensions [mm ²]	Power [W]	FUSE	Energy [kWh] - 100 Kg	Water [l/h]	Water [gal/h]	Weight [kg] [lbs]	Weight [kg] [lbs]
AF 80 AS	Air Cooled	2290 800	3 x 1	330	10	11	2.2	0.6	50 110	58 128
AF 80 WS	Water Cooled	2290 800	3 x 1	330	10	10.5	16	4.2	50 110	58 128