

AC 226

Scotsman
Ice Systems

Self Contained Ice Machine 145 kg

Item #:

Project:

Quantity:



FEATURES

- Produces individual Gourmet crystal clear ice cubes.
- Resistant stainless steel exterior.
- Advanced diagnostics computerized control.
- Front panel in and out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled version only).
- Easily accessible front panel mount ON-OFF Switch.
- Routine maintenance visible alarm light on front panel.
- Ergonomically designed ice storage access, with disappearing door. Door-closing movement dampening system.



AC L 226
Large Gourmet 39 g
Ø 38 x H 41 mm



AC M 226
Medium Gourmet 20 g
Ø 30 x H 34 mm



AC S 226
Small Gourmet 8 g
Ø 21 x H 25 mm

CONDENSING SYSTEM

Air cooled
Water cooled

REFRIGERANT GAS

R404A
R452A

VOLTAGE V/Hz/ph

230/50/1
230/60/1

INTERNAL BIN CAPACITY

70 kg

CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10	10

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

Download our free **App Scotsman Ice**
Apple store
Google play
Windows store

DOWNLOAD

www.scotsman-ice.it
www.scotsman-ice.com

Self Contained Ice Machine 145 kg

8 February 2019

AC 226


Self Contained Ice Machine 145 kg

Scotsman®
Ice Systems

Item #:

Project:

Quantity:

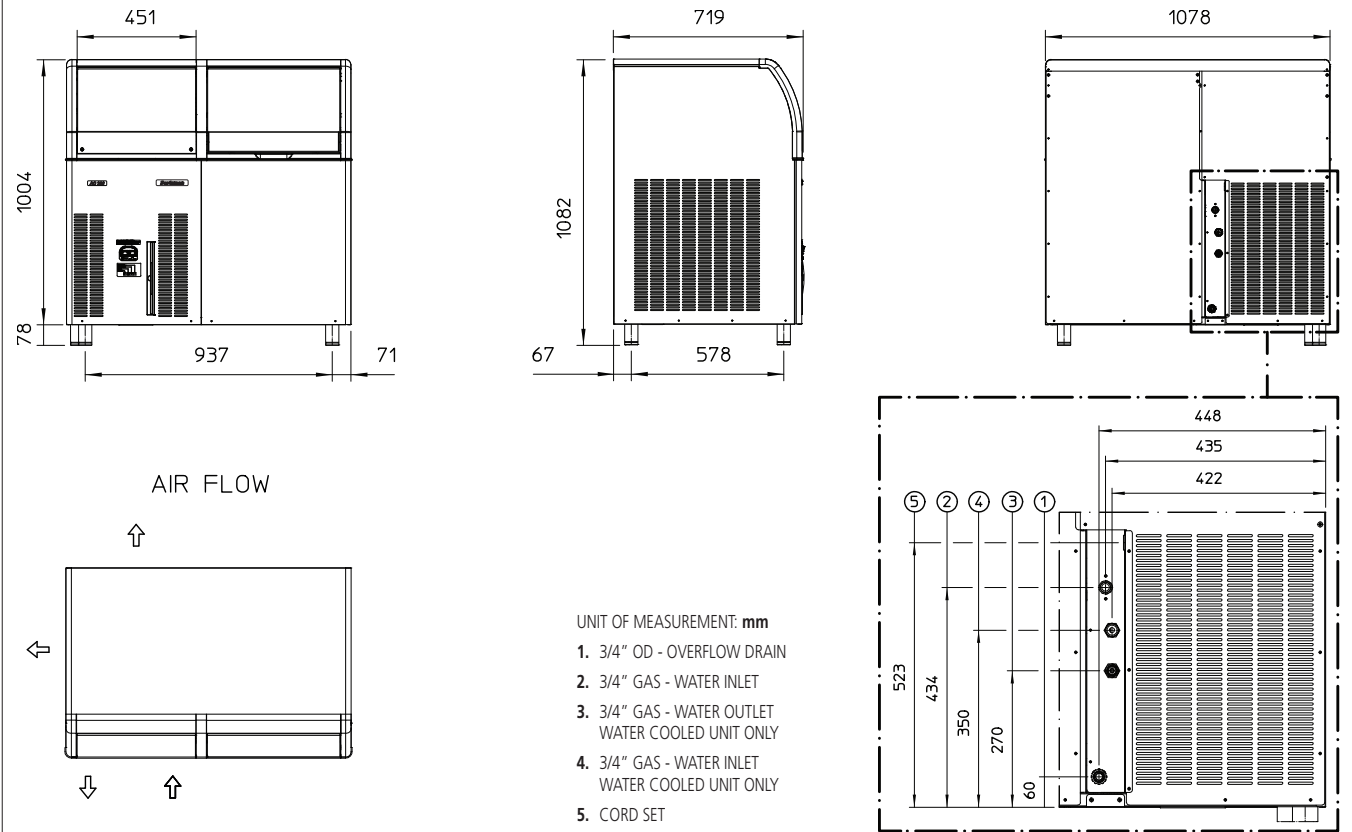

UNIT DATA				SHIPPING DATA							
Size (W x D x H)		1078 x 719 x 1082 mm		Carton (W x D x H)		1150 x 780 x 1160 mm					
Net weight		96 kg		Weight		110 kg		All data refer to R404A refrigerant models			
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
AC L 226 AS	230/50/1	134	128	101	23.6	23.7	11.3	1150	2650	3 x 1.5	16
AC M 226 AS	230/50/1	145	142	110	22.0	24.2	13.8	1150	2650	3 x 1.5	16
AC S 226 AS	230/50/1	145	140	110	22.5	24.7	16.7	1150	2650	3 x 1.5	16
AC L 226 WS	230/50/1	150	130	100	15.0	19.5	141.7	800	2650	3 x 1.5	16
AC M 226 WS	230/50/1	150	147	130	14.8	19.2	139.2	800	2650	3 x 1.5	16
AC S 226 WS	230/50/1	145	140	110	22.5	24.7	139.2	1300	2650	3 x 1.5	16
AC L 226 AS	230/60/1	147	143	114	23.3	26.4	13.1	1150	3100	3 x 1.5	16
AC M 226 AS	230/60/1	145	142	110	25.6	28.1	15.8	1150	3100	3 x 1.5	16
AC L 226 WS	230/60/1	147	143	114	23.3	26.4	141.7	1150	2650	3 x 1.5	16
AC M 226 WS	230/60/1	145	142	110	25.6	28.1	139.2	1150	3100	3 x 1.5	16

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions